


- Common mode chokes for telecom applications
- High impedance to minimize common mode noise
- Excellent EMI performance
- Operate temperature range: -40°C to +85°C
- Storage temperature range: -40°C to +125°C



Electrical Specifications @25°C

Part Number	OCL @100KHz, 0.1V (uH Min.)	DCR (mΩ Max.)	Turns Ratio	Rated Current (A) ΔT=40°C	Hi-Pot
		1-4, 2-3	1-4, 2-3	1-4:2-3	
CM422SG8ROU	8.0	60	1:1	1.5	500

MECHANICAL

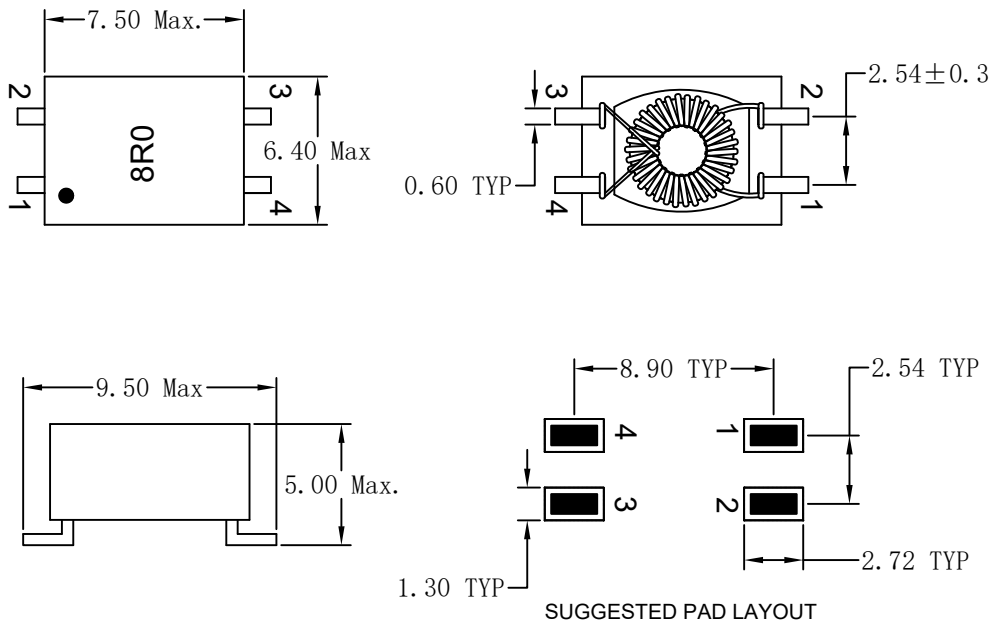

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

